



1295 1296

Single-needle and two-needle
lockstitch postbed sewing machine
with unison feed

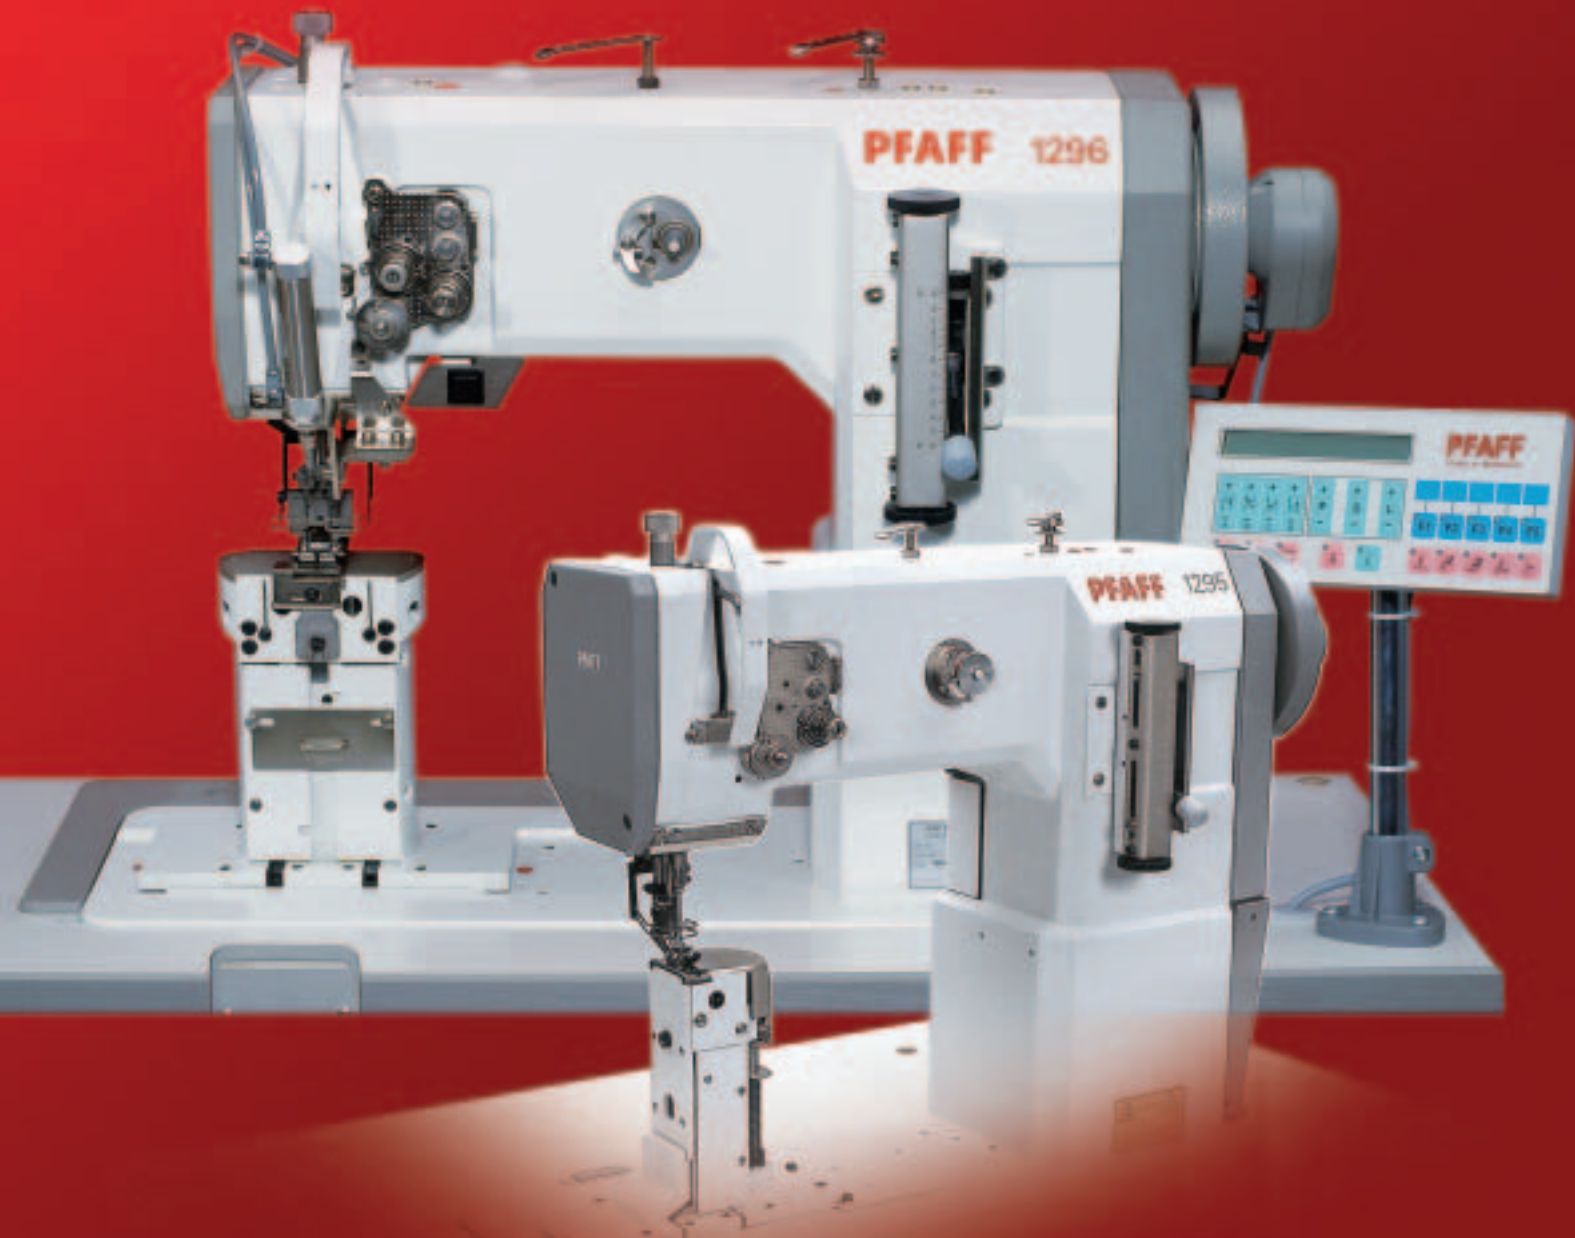


PFAFF 1295/96

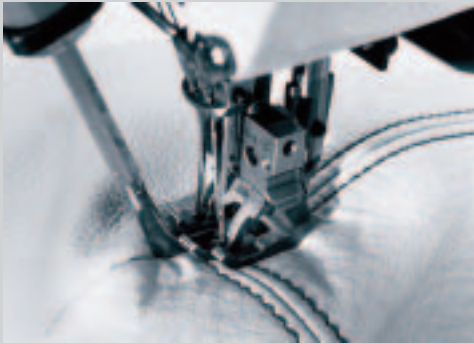

Special features:


- Unobstructed view of the stitching area
- The postbed design is ideal for handling shaped parts before or after they are closed
- Trouble-free stitching over cross-seams with no difference in stitch length, due to the alternating top feed with 7 mm stroke
- Accurate and consistent stitch formation on all materials, up to thread sizes of 15/3-ply, synth.
- Uncomplicated mechanical system guarantees perfect function
- Built-in bobbin winder within operator's view
- Large vertical hook with 60% more thread capacity than conventional hooks
- Protection of the hook against thread jamming by built-in and easy-to-handle overload clutch as standard equipment
- High sewing output and easy operation due to time- and cost-saving work aids, such as:
 - Thread trimmer
 - Automatic presser foot lift
 - Backtacking mechanism
 - Needle positioning mechanism
- Large fabric clearance of 14 mm for easier loading and removal of the workpiece
- As an alternative available with a long stitch (up to 11 mm) for rustic stitching

PFAFF 1295



-6/01


For plain seaming operations



-17/01-940/01


Part set for binding, with balcony-shaped needle plate for sewing convex-shaped workpieces (binding attachment required as extra)

PFAFF 1296




-6/01

For plain seaming operations



-63/14

Fancy- and top-stitching operations, also on one-sided bulky cross-seams; compensating presser with seam guide, tape guide from below



-63/15

Fancy- and top-stitching operations, also on one-sided bulky cross-seams; compensating presser, pneumatically operated, engageable middle seam guide and tape guide from below

Models and Work aids from the PFAFF 1295/1296:

Models:

- C** For medium to heavy materials
- L** Leathers
- S** Fabrics
- M** Overload clutch for protection of hook
- N** Max. stitch length 6 mm, forwards and reverse
- P** Four-motion drop feed version

Work aids:

-900/56

Thread trimmer

-911/97

Automatic presser foot lift and backtacking

(for operation a pneumatic air filter/regulator is required, Pfaff part No. 91-187 426-70/893)

Standard sales range	Thread trimmer -900/56	Automatic presser foot lift and backtacking -911/97	Four-motion drop feed	Needle gauge
1295-6/01 CLMN				
1295-6/01 CLPMN			●	
1295-6/01-900/56 CLMN	●			
1295-6/01-900/56 CLPMN	●		●	
1295-6/01-900/56-911/97 CLPMN	●	●	●	
1295-17/01-650/03-940/01 CLMN				
1295-6/01-911/97 CLPM N11		●	●	
1296-6/01 CL x 3.2 PMN			●	3.2
1296-6/01 CL x 6.0 MN				6.0
1296-6/01 CL x 10.0 MN				10.0
1296-6/01 CL x 10.0 PMN			●	10.0
1296-6/01-900/56 CL x 3.2 PMN	●		●	3.2
1296-6/01-900/56-911/97 CL x 3.2 MN	●	●		3.2
1296-6/01-900/56-911/97 CL x 4.8 PMN	●	●	●	4.8
1296-6/01-900/56-911/97 CL x 6.0 PMN	●	●	●	6.0
1296-6/01-900/56 CL x 10.0 MN	●			10.0
1296-6/01-900/56 CL x 10.0 PMN	●		●	10.0
1296-6/01-900/56-911/97 CL x 10.0 MN	●	●		10.0
1296-63/14-900/56 CL x 8.0 PMN	●		●	8.0
1296-63/15-900/56-911/97 CL x 6.0 MN	●	●		6.0
1296-63/15-900/56 CL x 8.0 MN	●			8.0
1296-63/15-911/97 CL x 10.0 PM N11		●	●	10.0
1296-63/15-911/97 CL x 12.0 PM N11		●	●	12.0

Separately available part sets for the PFAFF 1296 without -900/56

-6/01 C x 3.2 N	91-202138-00/003
-6/01 C x 6.4 N	91-202138-00/005
-6/01 C x 8.0 N	91-202138-00/006
-6/01 C x 10.0 N	91-202138-00/002
-63/03 C x 8.0 N	91-202190-00/001
-63/03 C x 10.0 N	91-202190-00/002

Separately available part sets for the PFAFF 1296-900/56

-6/01 C x 3.2 N	91-202139-00/002
-6/01 C x 6.4 N	91-202139-00/003
-6/01 C x 8.0 N	91-202139-00/004
-6/01 C x 10.0 N	91-202139-00/005

More parts sets on enquiry

Specifications:

Stitch type:

301 (lockstitch)

Maximum speeds:

1295:

1,900 s.p.m.

1295-6/37:

2,200 s.p.m.

(link take-up)

1296:

1,800 s.p.m.

The maximum speed depends on the stroke, stitch length, material and sewing operation

Fabric clearance:

14 mm

Top feed stroke:

7 mm

Needle size:

110 to 180

Needle system:

134-35

Usable thread size:

15/3-ply

Model: C

Clear workspace:

270 x 270 mm

Motor:

0.55 kW

Bedplate dimensions:

518 x 177 mm

Net weight:

approx. 56 kg

Gross weight:

approx. 64 kg

Carton dimensions:

80 x 71 x 31 cm

Effective balance wheel dia.:

90 mm

The machine is equipped as standard with finger guard, belt- and take-up lever guards.

Hotlines:

Technical service: +49-175/2243-101

Application consultancy: +49-175/2243-102

Spare-parts hotline: +49-175/2243-103



Europäische Union
Wachstum durch Innovation – EFRE



**PFAFF Industriesysteme
und Maschinen AG**

Hans-Geiger-Str. 12 – IG Nord
D-67661 Kaiserslautern

Telefon: +49-631/200-0

Telefax: +49-631/17202

E-mail: info@pfaff-industrial.com

Printed in Germany
engl.
296-12-18730 03/07